

VECTOR[®]

Service, Performance, Reliability™



*The industry's
most trusted supplier
of Specialty Films*


TECHNICAL DATA:

Vector's V5861

Etch Cast Vinyl

A high performance cast vinyl film which duplicate the etched look when applied to glass. The film is 2 mils and has a uniform light density and gloss to optimize the etch appearance. The etch film comes with a controlled release liner for optimum die cutting and weeding.

Face Material	2 mils
Adhesive	Permanent acrylic
Color	White Matte
Liner	78# kraft
Elongation	100%
Printability	Inks Solvent and UV screen inks
Processability	Steel rule. Thermal and Rotary Die-cutting; Computerized Signmaking
Applications	Flat and curved surfaces
Adhesion	To stainless steel - 20 min - 45 oz./in. 24 hr - 64 oz./in
Outdoor Durability	5 years
Temperature Ranges	Minimum application temperature is +40°F. Service temperature range is -50°F to +225°F.
Storage Stability	2-year shelf life when stored at 73°F and 50% relative humidity.
Chemical Resistance	Detergent (24hrs) No Effect Distilled Water (24hrs) No Effect SAE 20 Motor Oil (24hrs) No Effect Gasoline (1hr) No Effect 10% HCL (10min) No Effect 10% NH ₄ OH (10min) No Effect

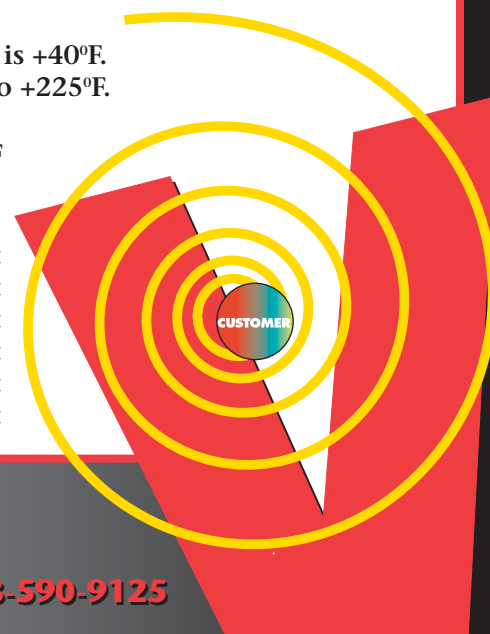

VECTOR[®]

925 Saw Mill River Rd., Yonkers, NY 10710

T: 914-963-8500 or 800-345-6027 • F: 914-963-9125 or 888-590-9125

www.vectorgraphics.com • sales@vectorgraphics.com