

# VECTOR<sup>®</sup>

Service, Performance, Reliability™



*The industry's  
most trusted supplier  
of Specialty Films*


## TECHNICAL DATA:

### Vector's VMPI2021

#### Flexible Clear Gloss PVC (Removable Adhesive)

A 3.4mil premium clear gloss flexible calendared PVC film coated with 200-4982 removable acrylic pressure sensitive adhesive laminated to a 90# layflat liner. This film is designed to accept a variety of solvent-based inkjet and UV curable inks common to wide format printing systems.

Applications	Temporary interior or exterior signage, decals, nameplates, die-cut letters and point of purchase displays
Face Material	3.4 mils
Adhesive	.8 to 1 mils
Liner	6.7 mils
Adhesion	To glass - 3 to 10 oz./in. To glass - 5 to 13 oz./in.
	PSTC-1 with 24-hour dwell at 70°F and 50% relative humidity. Typical values. Individual values may vary. Test thoroughly before production.
Outdoor Durability	Clear vinyl film can yellow with exposure to UV radiation. Must be tested for specific usage. Removable up to 1-year under normal conditions.
Water Resistance	Limited immersion resistance. Test for specific application. If using the wet application method the product may fog when exposed to water. This condition will usually clear within 48 hours at normal temperature and humidity.
Humidity Resistance	Good. Under high humidity conditions product may fog. This condition will usually clear within 48 hours at normal temperature and humidity.
Temperature Ranges	Minimum application temperature is +40°F. Service temperature range is -40°F to +180°F.
Storage Stability	6-month shelf life when stored at 70°F and 50% relative humidity.
Dimensional Stability	Good
Humidity Resistance	Good

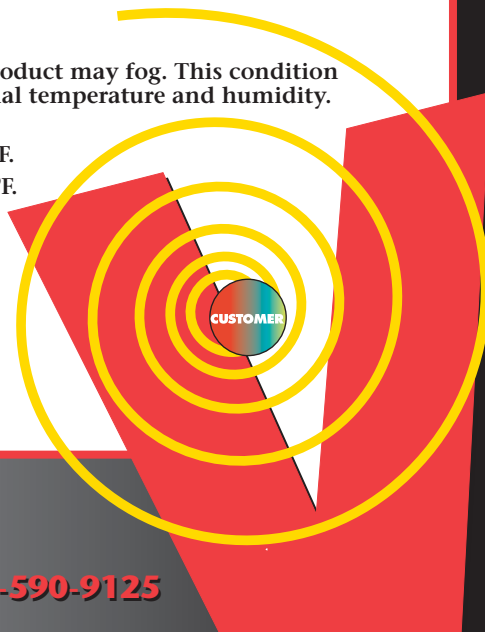

**VECTOR<sup>®</sup>**

**925 Saw Mill River Rd., Yonkers, NY 10710**

**T: 914-963-8500 or 800-345-6027 • F: 914-963-9125 or 888-590-9125**

**[www.vectorgraphics.com](http://www.vectorgraphics.com) • [sales@vectorgraphics.com](mailto:sales@vectorgraphics.com)**